

ASYMMETRIC SPINNAKER FURLERS



The FX+ furler, fitted with the Fast thimble, allows to furl in the asymmetric Spinnakers from the cockpit by pulling the bottom furling line. The anti-twist rope rotates up to the top and then transmits the rotation from the head to the tack of sail. With this simple system it is possible to use your existing asymmetric Spinnaker.

FAST ASYMMETRIC SPINNAKER THIMBLE

FX+ FAST

- FAST thimble : with the FX+ furler, this FAST system allows you to use your FX+ from Gennaker to asymmetric Spinnaker in a two clicks
- Possibility to use your existing asymmetric Spinnaker
- Easy and regular furling from top to bottom (see pictures below). Free luff on asymmetric Spinnaker
- Same FX+ features : tested mechanisms, strong and clever
- Maintenance free: high protection of the mechanisms

Anti-twist rope
(supplied on request)

Simple mechanisms FX+



Smooth rotation
Torlon® balls


Safe tack attachment.
Stainless steel. Resistant and smooth edge for a secure lashing



> Video
Fast FX+



Carbon housing
strong and light

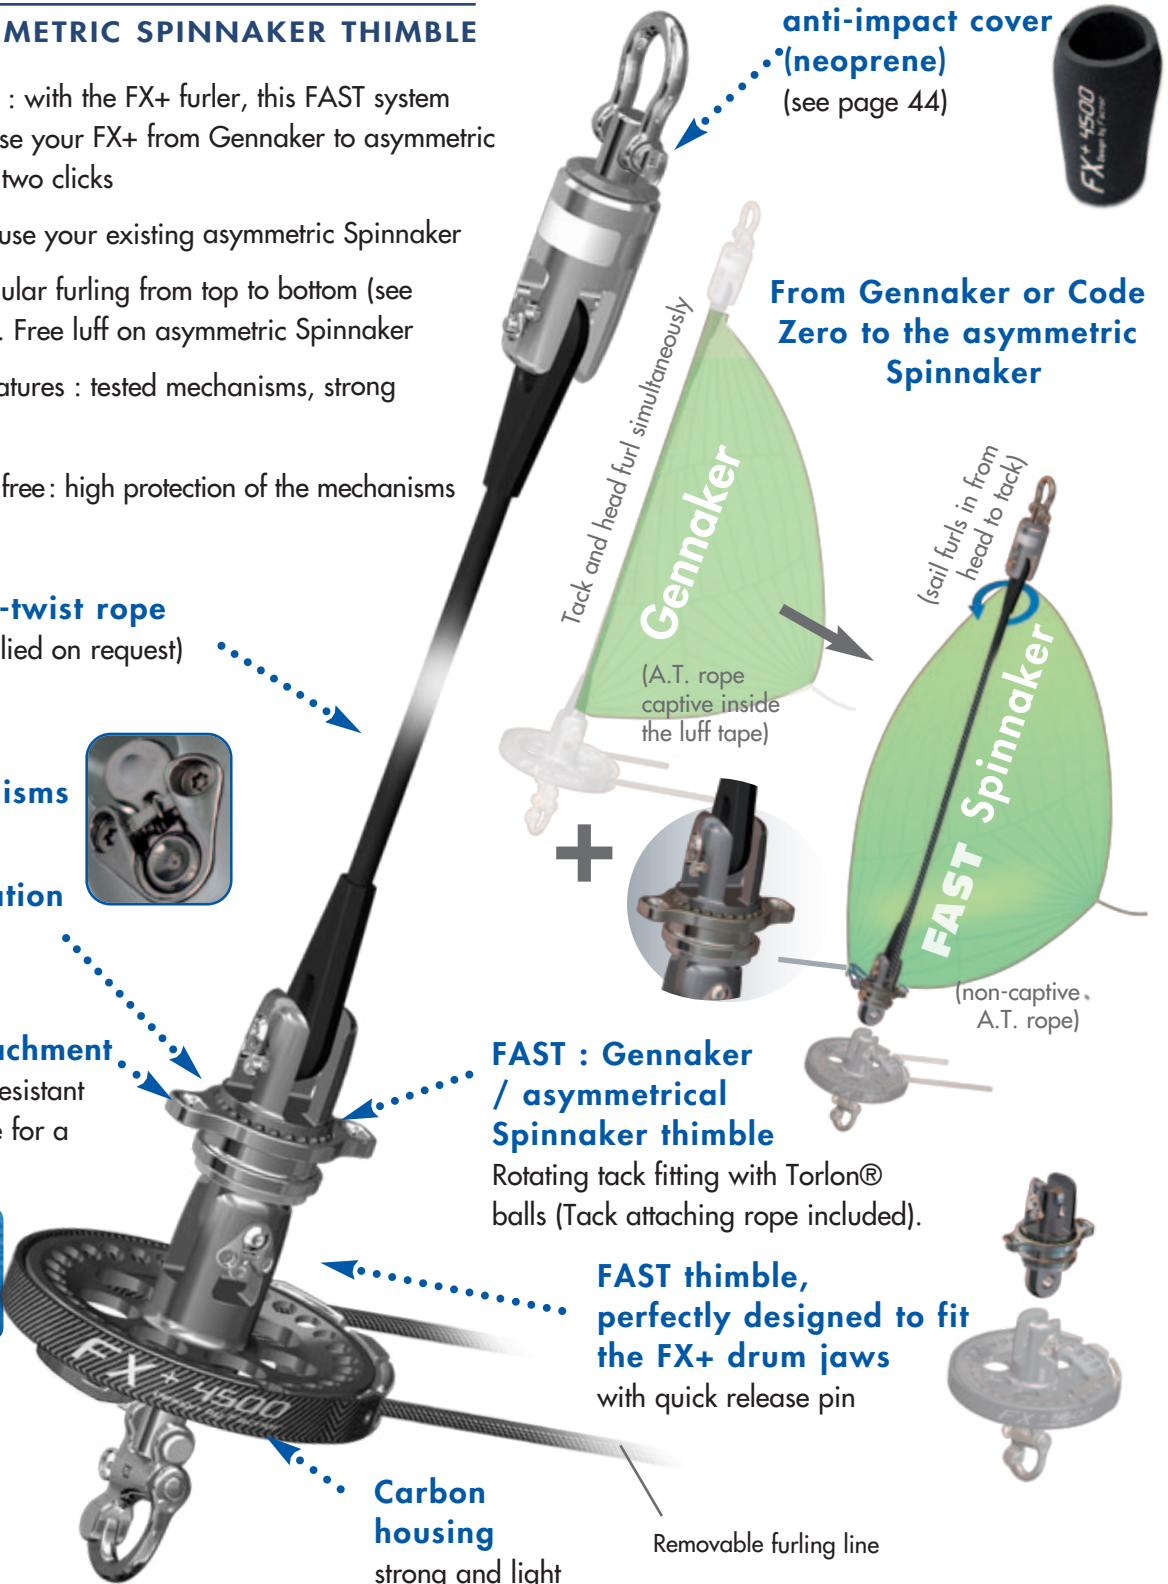

FX+ swivel with anti-impact cover (neoprene)
(see page 44)



From Gennaker or Code Zero to the asymmetric Spinnaker

Tack and head furl simultaneously

Gennaker
(A.T. rope captive inside the luff tape)

(sail furls in from head to tack)

FAST Spinnaker
(non-captive A.T. rope)


FAST : Gennaker / asymmetrical Spinnaker thimble

Rotating tack fitting with Torlon® balls (Tack attaching rope included).

FAST thimble, perfectly designed to fit the FX+ drum jaws with quick release pin


Removable furling line

"top-down" system

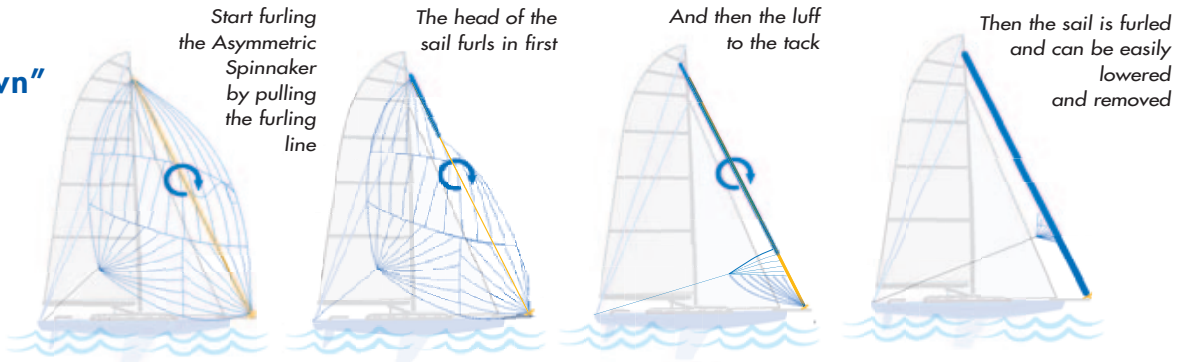

FX+ Furler

FAST thimble

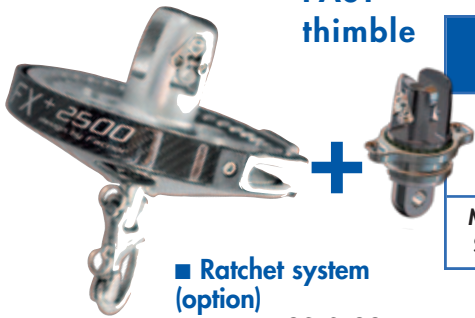

■ **Ratchet system (option)**
see page 32 & 33

FX+ / FAST : FURLER MODELS

Model	FX+ FAST 900	FX+ FAST 1500	FX+ FAST 2500	FX+ FAST 4500	FX+ FAST 7000	FX+ FAST 12000
Boat length meter / feet	6 → 10,5 20 → 28'	10 → 12 28 → 40'	12 → 14 40 → 45'	13 → 16 42 → 55'	16 → 20 55 → 70'	contact us
Max asymmetric Spinnaker area	40 m ² 430 Ft ²	80 m ² 861 Ft ²	150 m ² 1614 Ft ²	240 m ² 2583 Ft ²	340 m ² 3660 Ft ²	

FX+ FAST: Option fitting for asymmetric Spinnaker
(System suitable for use with an existing FX furler)



Fast thimbles for FX+ furlers					
Model	FX+/FXT Model	Jaw width (mm)	Height* (mm)	Weight (g)	Reference
FAST 900	FX+ 900	12	65	220	43230000940
FAST 1500	FX+ 1500	15	65	222	43230001540
FAST 2500	FX+ 2500	17,5	82	426	43230002540
FAST 4500	FX+ 4500	19	92	581	43230004540
FAST 7000	FX+ 7000	26	119	1114	43230007040
FAST 12000	contact us				
Custom	contact us				

* Pin to pin

Two options are available to adjust the tack of your asymmetric Spinnaker :

■ **SSH+ solid sheave :**

- used to adjust the tack point, with a maximum luff;
- This option is available from 1500 up to 12000 (above models on request).


■ **Soft converter :**

- Soft converting part for snapshackle (Wichard)
- Available for FX+ 4500 and FX+ 7000



→ see page 45

TACK ADJUSTMENT

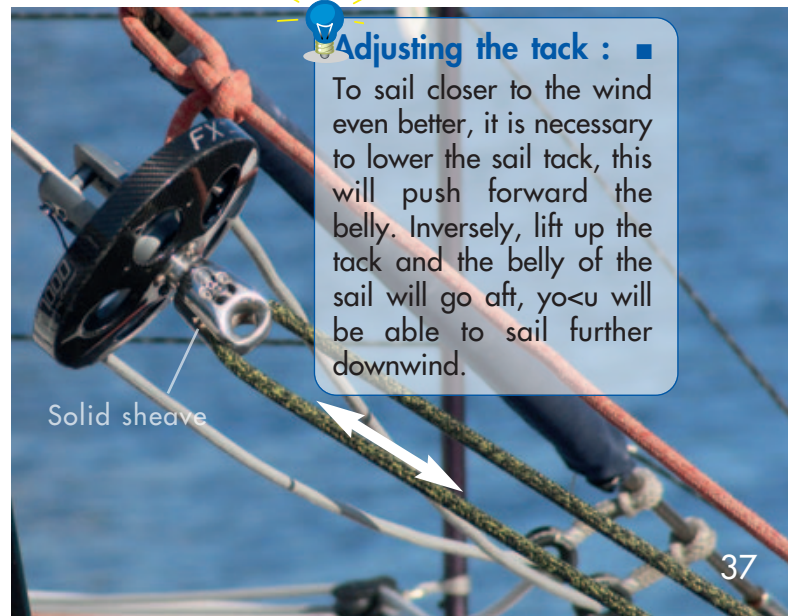

Adjusting the tack : ■

To sail closer to the wind even better, it is necessary to lower the sail tack, this will push forward the belly. Inversely, lift up the tack and the belly of the sail will go aft, you will be able to sail further downwind.

Solid sheave