




PLAIN BEARING BLOCK 60

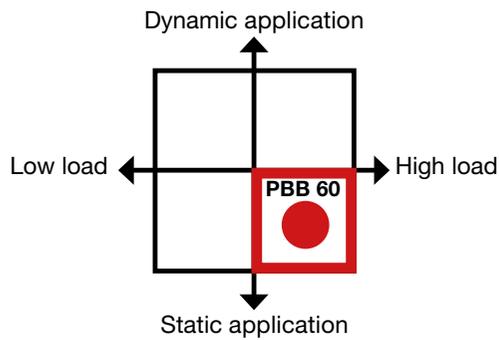

TECHNICAL FEATURES PBB 60

- Polymer sheave.
- Stainless steel strap for strength and long service life.
- Torsional rigid cheeks in glass fibre reinforced polymer to prevent jamming.
- Sliding swivel locking mechanism.

1  Single	2  Single becket	3  Single cam
4  Single becket cam	5  Double	6  Double becket
7  Triple	8  Triple becket	9  Triple cam

10



Triple becket cam

11



Fiddle

12



Fiddle becket

13



Fiddle cam

14



Fiddle becket cam

15



Cheek

16



Cheek R345

17



Cheek R48

18



Double cheek

19

Fiddle, twin-cam
For Seldén CX and
GX furling systems

20

Single with bow
shackle

PBB 60

	Art. No.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle/ fasteners (Ø mm)
1	406-001-01R	189	1000	2000	14	6
2	406-001-02R	211	1000	2000	14	6
3	406-001-03R	286	120**	240	12	6
4	406-001-04R	308	240**	480	12	6
5	406-001-05R	357	1000	2000	14	6
6	406-001-06R	378	1000	2000	14	6
7	406-001-07R	500	1000	2000	14	6
8	406-001-08R	524	1000	2000	14	6
9	406-001-09R	658	600**	1200	12	6
10	406-001-10R	670	720**	1440	12	6
11	406-001-11R	254	1000	2000	14	6
12	406-001-12R	271	1000	2000	14	6
13	406-001-13R	350	360**	720	12	6
14	406-001-14R	369	480**	960	12	6
15	406-001-15R	141	1000	2000	14	3xM6 (not included)
16	406-001-16R	137	1000	2000	14	3xM6 (not included)
17	406-001-17R	145	1000	2000	14	3xM6 (not included)
18	406-001-20R	292	1000*	2000*	14	3xM6 (not included)
19	406-001-40R	500	120**	240	12	406-040-01R
20	406-001-23R	195	1000	2000	14	6

* Upper sheave: Safe working load = 500 kg. Breaking load = 1000 kg.

** Safe working load based on Cam cleat 433-201-01.

For more information about dimensioning, see page 104.